

หจก. ทีซี แฟคทอรี แอนด์ ซัพพลาย

31/4 หมู่ 6 ถนนบรมราชชนนี ดลิ่งชั้น กรุงเทพฯ 10170
ฝ่ายขาย 063-207-8559, 095-813-2281

Camlock Type A

Male Adaptor with female thread


Material: **SS316**

Thread: **NPT, BSP**

Application: **Water, Oil, Chemical etc**

Standard: **A-A59326 (MIL-C-27487)**

Certificate: **CE, ISO**

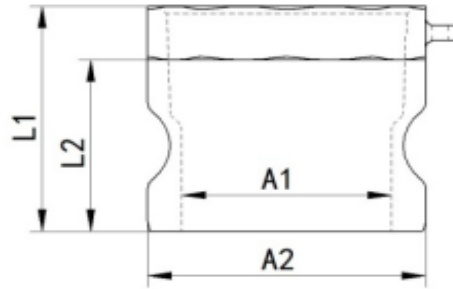

Dimension

Size(mm)	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
L1	32.5	34.5	41.5	51.5	53.5	61.5	77	67	71
L2	25	26.5	31.5	39	41.5	48	46.5	50	50
A1	24.5	23	26	31	39.5	48	62.5	75	102
A2	23.84	32.1	36.8	45.1	53.3	63	75.8	91.5	119.5
WP (PSI)	150	250	250	250	250	250	225	200	100

Camlock Type B

Female Coupler with male thread

Material: **SS316**


Gasket : **NBR, VITON**

Thread: **NPT, BSP**

Application: **Water, Oil, Chemical etc**

Standard: **A-A59326 (MIL-C-27487)**

Certificate: **CE, ISO**

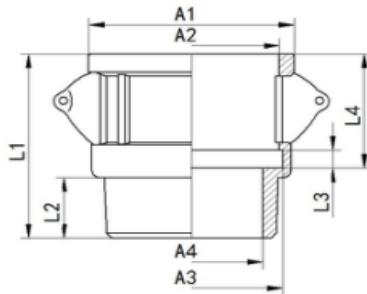

Dimension

Size(mm)	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
L1	44	46	55	60.5	68	73	85	82	88
L2	15.5	16	19	20	24	24.5	31.5	28	31
L3	4.5	6.35	6.5	7.14	7.14	7.14	7.14	7.14	7.14
L4	25.5	27	33	38	41	45	49	49	48
A1	33.5	40.5	46.5	55	63.5	73.5	88	104.5	134.5
A2	24.5	32.7	37.8	46	54	64	76.8	92.2	120.5
A3	26	36.12	38.5	50.8	57.2	66	78	96	124
A4	15	20	26	34	39	51	63.5	76	103
WP (PSI)	150	250	250	250	250	250	225	200	100