

## Camlock Type E

Male Adaptor with Hose Shank

Material: **SS316**


Gasket : **NBR, VITON**

Thread: **NPT, BSP**

Application: **Water, Oil, Chemical etc**

Standard: **A-A59326 (MIL-C-27487)**

Certificate: **CE, ISO**



Dimension									
Size(mm)	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
<b>L1</b>	73	87	98	113	114.5	144	141	159	179
<b>L2</b>	23	25	27	36	38	45	46	47	44
<b>L3</b>	40	51	59	61	66	84.5	80.5	97.5	115.5
<b>L4</b>	7	9	9	9	9	9.5	10	13	13
<b>L5</b>	14	16	18	21	21	32.5	28	34	45
<b>A1</b>	23.84	32.1	36.8	45.1	53.3	63	75.8	91.5	119.5
<b>A2</b>	15	23	25	34	39	48.5	63	76	103
<b>A3</b>	9	15.5	20	27	34	46	60	70	92
<b>A4</b>	13	19	25	31.5	38	51	67.5	76	99
<b>WP (PSI)</b>	<b>150</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>225</b>	<b>200</b>	<b>100</b>

## Camlock Type F

Male Adaptor with male thread

Material: **SS316**


Gasket : **NBR, VITON**

Thread: **NPT, BSP**

Application: **Water, Oil, Chemical etc**

Standard: **A-A59326 (MIL-C-27487)**

Certificate: **CE, ISO**

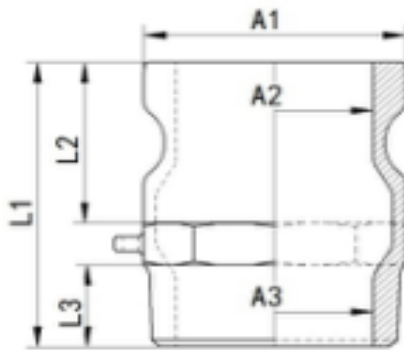

Dimension									
Size(mm)	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
<b>L1</b>	47	46.5	59	67	71	85	81	92.5	103
<b>L2</b>	25	24	32	38	39	48	45	48	50
<b>L3</b>	15	14	18	19	21	25	23	27	31
<b>A1</b>	23.84	32.1	36.8	45.1	53.3	63	75.8	91.5	119.5
<b>A2</b>	15	23	26	35	38	49	64	76	103
<b>A3</b>	14.5	21	26	35	39	50	63	75	103
<b>WP (PSI)</b>	<b>150</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>250</b>	<b>225</b>	<b>200</b>	<b>100</b>